

7-1000

A

Atty Docket: COO94401

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of :  
Ivan George COOPER :  
Serial No. Not Yet Assigned :  
Filed: Concurrently herewith :  
Title: METHOD AND APPARATUS :  
FOR :  
RECONDITIONING DIGITAL :  
DISCS :

July 7, 2000

EXPRESS MAIL POST OFFICE TO ADDRESSEE

BOX: PATENT APPLICATION

Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the patent  
application of:

Applicant(s): Ivan George COOPER  
Inventor(s): Same As Applicant  
For: METHOD AND APPARATUS FOR  
RECONDITIONING DIGITAL DISCS

Enclosed are:

1. Disclosure twenty-five (25) page(s);
2. Nineteen (19) claims (3  
independent, 16 dependent);
3. Abstract Of The Disclosure (1 page);
4. Informal Drawings (4 sheets);
5. Express Mail Certificate; and
6. Acknowledgement postcard.



09/611625

Pursuant to the provisions of 37 CFR S.1.10 and 1.53, applicant respectfully requests that this application be assigned a serial number and a filing date of July 7, 2000 the date upon which the application was forwarded to the Patent and Trademark Office by Express Mail Post Office to Addressee.

The fee has been calculated as shown below:

Total claims 19\*

(A fee is paid for each claim in excess of 20)

Total independent claims 3\*\*

(A fee is paid for each independent claim in excess of 3)

Multiple dependent claim 0\*\*\*

(A fee is paid for each multiple dependent claim)

<u>Small Entity</u>		<u>Large Entity</u>	
Basic Fee =	\$345.00	Basic Fee =	\$690.00
*0 x \$9.00	0.00	*0 x \$18.00	0.00
**2 x \$39.00	0.00	**0 x \$78.00	0.00
***0 x \$130.00	<u>0.00</u>	***0 x \$260.00	<u>0.00</u>
TOTAL FEE:	<u>\$345.00</u>		<u>000.00</u>

Please address all correspondence to:

John Russell Uren, P. Eng.  
Suite 202 - 1590 Bellevue Avenue  
West Vancouver, British Columbia  
Canada, V7V 1A7

Telephone: (604) 922-2997 (Vancouver, Canada)  
(206) 945-3411 (Washington State)

We look forward to receipt of the enclosed acknowledgement post card in due course.

Respectfully submitted,

IVAN GEORGE COOPER

Per: \_\_\_\_\_

John R. Uren  
Regn. No. 27,530

JRU/jg  
Encls.

Date: July 7, 2000

John Russell Uren, P. Eng.  
Suite 202 - 1590 Bellevue Avenue  
West Vancouver, British Columbia  
Canada, V7V 1A7

Telephone: (604) 922-2997 (West Vancouver, Canada)  
(360) 945-3411 (Washington State)

I HEREBY CERTIFY THAT THIS DOCUMENT AND/OR FIGURE  
BEING DEPOSITED WITH THE UNITED STATES POSTAL  
SERVICE "EXPRESS MAIL" POST OFFICE 1 TO ADDRESS  
SERVICE UNDER 37 C.F.R. 1.10 ON THE DATE INDICATED  
BELOW AND IS ADDRESSED TO THE COMMISSIONER OF  
PATENTS AND TRADEMARKS, WASHINGTON, D.C. 20540

DATE OF DEPOSIT: July 7, 2000

EXPRESS MAIL MAILING NUMBER: EK 738616343US

JOHN R. UREN  
Reg. No. 27,530

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of :  
Ivan George COOPER :  
Serial No. Not Yet Assigned :  
Filed: Concurrently herewith :  
Title: METHOD AND APPARATUS :  
FOR :  
RECONDITIONING DIGITAL :  
DISCS :

July 7, 2000

EXPRESS MAIL CERTIFICATE PURSUANT TO 37 CFR 1.10

Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

I, the undersigned, hereby certify that the enclosed new patent application including specification (25 pages including claims and abstract) and informal drawings (4 sheets) is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated below, and is addressed to the Commissioner of Patents and Trademarks, United States Patent and Trademark Office, Washington, D.C. 20231.

Respectfully submitted,

IVAN GEORGE COOPER

July 7, 2000

Date

By:

John R. Uren

Reg. No. 27,530

Date of Deposit: July 7, 2000

Express Mail Mailing Number: EK738616343US

## TITLE

### METHOD AND APPARATUS FOR RECONDITIONING DIGITAL DISCS

## INTRODUCTION

5 This invention relates to apparatus for  
reconditioning digital discs and, more particularly, to  
apparatus used for reconditioning damaged digital discs and  
to the method used for such reconditioning.

## BACKGROUND OF THE INVENTION

10 Digital discs are pervasive in computer  
operations. They may take various configurations but DVD  
(digital video discs) and CD-ROM (compact discs-read only  
memory) are two of the more common. The construction of the  
discs comprises, typically, a layer of aluminum on which is  
deposited the digital data to be read and a plastic coating  
15 which overlays the data on the aluminum disc and provides

some measure of protection for the data.

Digital discs may be and are frequently damaged. This is particularly the case where the discs are temporarily used such as in rental operations and the like where customers of such rental operations have no particular reason to take care of such discs during rental. This results in the discs being returned to the rental establishment in a damaged condition.

Compact discs are expensive to replace and since the data underlying the plastic overlay typically still retains its integrity, there is reason to restore the disc to its original condition or, at least, to a condition where the data can be properly read through the plastic layer. By so doing, the need for discarding the damaged disc and purchasing a further disc is obviated and money is saved.

Reconditioning the protective overlay coating in a digital disc is known. Such an apparatus and method is described and illustrated, for example, in United States Patents 5,954,566 and 5,733,179, both to Bauer. These patents teach a technique for reconditioning a protective

coating by using a buffing tool which buffs the damaged protective coating on the disc. The disc is mounted on a turntable which has a controllable rotation speed. The buffing tool is brought into contact with the protective coating and rotated by a motor. By rotating the buffing tool, the protective coating is reconditioned to allow optical reading of the data. However, manual manipulation of the disc is required before, during and after the buffing operation.

Canadian Patent 2,230,394 (Perego) teaches an automatic technique for producing optical discs. Work stations are located in two parallel advance lines. The disc being produced advances down one line and returns on the other line. However, there is no teaching of reconditioning digital discs.

Canadian patent application serial no. 2,169,609 teaches a method and apparatus for reconditioning compact discs. The technique, however, similar to the Bauer teachings, uses manual operation to refurbish the damaged coating of compact discs. The manual operation clearly puts limits on the number of discs that may be damaged and

reconditioned and the efficiency of reconditioning large numbers of digital discs.

SUMMARY OF THE INVENTION

According to one aspect of the invention, there is  
5 provided apparatus for reconditioning a protective coating  
on a digital disc, said apparatus comprising at least one  
tool at a first workstation being operable to be brought  
into contact with said protective coating and a disc  
advancement mechanism to advance said digital disc from said  
10 first workstation to a second and successive workstation.

According to a further aspect of the invention,  
there is provided a method for reconditioning a protective  
coating on a compact disc, said method comprising  
positioning said disc in a first workstation, bringing a  
15 first tool into contact with said protective coating for  
reconditioning said protective coating in a first operation  
and transferring said compact disc from said first  
workstation to a subsequent work station when said first  
tool has completed said first operation.



According to a further aspect of the invention,  
there is provided a method of reconditioning a plurality of  
digital discs which have had protective coatings damaged  
resulting in a misread or a non-read of data on said discs,  
5 said method comprising obtaining said digital discs from a  
source of digital discs, transferring said digital discs  
from said source to a protective coating reconditioning  
machine, reconditioning said protective coatings of said  
digital discs in said reconditioning machine by automatic  
10 transfer of said discs between at least two workstations in  
a reconditioning process to obtain reconditioned discs and  
returning said reconditioned discs to said source.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Specific embodiments of the invention will now be  
15 described, with the use of drawings, in which:

Figure 1 is a diagrammatic isometric view of the  
digital disc reconditioning apparatus according to the  
invention;

Figure 2 is a side view of the disc reconditioning

apparatus particularly illustrating the bellcrank used to rotate the shaft used for digital disc advancement from work station to workstation;

Figure 3 is a plan view illustrating the work tools and drive belts used at respective successive workstations, the rotatable turntable movable between the disc load and unload positions and the shaft which holds and rotates the suction tools; and

Figure 4 is a side view of the disc reconditioning machine particularly illustrating the work tools connected to the upper head at successive workstations and the turntables at each workstation according to the invention.

#### DESCRIPTION OF SPECIFIC EMBODIMENT

Referring now to the drawings, a digital disc reconditioning machine is illustrated generally at 100 in Figure 1. It comprises four(4) principal operating areas, namely a feed area generally illustrated at 101, a disc reconditioning area generally illustrated at 102, a head and tool area generally illustrated at 103 in the upper area of

the reconditioning machine 100 and the motive area generally illustrated at 104 which is located in the lower area of the reconditioning machine 100. A controller 105 is used to properly sequence the various events occurring during the reconditioning process as will be described.

10 The feed area 101 comprises a turntable 110 which is rotatable by an electric motor 111 which is a DC type motor and which is therefore adjustable to provide various revolution speeds as the operator may desire for the particular operation. Turntable 110 is a plastic composite type turntable with a single circular recess 112 formed therein. The recess 112 is approximately 3/16 inch deep and is the approximate diameter of the digital disc being reconditioned. The recess 112 allows a digital disc to be held during the feed operation as the turntable 110 rotates reciprocally as will be described.

20 The feed area 101 further includes the digital disc cartridge 113. The digital disc cartridge 113 is intended to hold a plurality of digital discs, conveniently 60 to 100, which digital discs enter the recess 112, one by one, as will be described.

The turntable 110 reciprocates about the axis of rotation 114 by use of a bell crank or arm 164 (Figure 3) between two positions. The first position 170 is the load position. The recess 112 is brought directly beneath the digital disc cartridge 113. The second position 171 is the unload position. This position brings the disc held by recess 112 into position for removal from the recess 112 by the suction tools 130 (Figure 1) wherein reconditioning commences. The bell crank 164 is operable from motor 11 which moves the turntable 110 between the two working positions 170, 171. The rotational speed of the motor 111, being adjustable, can thereby increase or decrease the speed with which the turntable rotates between the unload and load positions and thereby the speed with which digital discs enter the reconditioning process.

The disc reconditioning area 102 comprises a series, conveniently four(4), workstations. Each workstation is defined by a respective turntable 120, 121, 122, 123. A rotatable and reciprocal hollow shaft 124 allows a plurality of suction tools 130 (see also Figure 4) conveniently five(5) such tools 130, to simultaneously lift the plurality of digital discs being reconditioned and to

move each of the discs to a successive work station. The shaft 124 is hollow thereby to carry a vacuum or negative pressure which is transferred to the suction tools 130.

The suction tools 130 conveniently have three  
5 rubber suction heads 131 which are connected to a mounting frame 132. Mounting frame 132 is made from tubing and is connected to shaft 124. The tubing allows the suction within shaft 124 to be transferred to the suction heads 131 used to grasp and move the digital discs. The suction  
10 within shaft 124 is conveniently generated by air under pressure being passed through a nozzle which air then passes over a port (not illustrated). A suction is thereby generated within the cavity to which the port is attached, namely the inside of hollow shaft 124.

15 An electric motor 133 of the DC variety is mounted on the lower frame 134. Electric motor 133 is adjustable and drives the turntables 120, 121, 122, 123 at rotational speeds as desired by the operator.

An upper head 140 is mounted on guide rails 141,  
20 142 and a pneumatic cylinder 143 is operable to raise and

lower the upper head 140 with the attached work tools so as to bring the work tools into contact with the plastic overlay of the digital disc. The worktools used are different at each workstation as described hereafter.

5                   The first workstation defined by turntable 120 comprises three worktools 144, 145, 146. Worktools 144, 145 are sanding tools (see also Figure 4) and conveniently utilise an aluminum oxide or carbide material for contacting and sanding the discs. Each of the sets of tools 144, 145, 10   146 is rotatable by an individual DC motor 147 (only one of which is shown). Thus, the rotational speed of the worktools at each workstation may be adjusted relative to the rotational speed of the worktools at other workstations. The work tools 144, 145 serve to remove a small amount of 15   material from the plastic overlay on the digital disc and thereby to perform the initial reconditioning operation.

                  Worktool 146 is a holding member (Figure 4). Worktool 146 exerts a downwardly directed force on the digital disc on turntable 120 and, as turntable 120 rotates, 20   so likewise will the head of worktool 146. The function of the worktool 146 is to exert sufficient force on the digital

disc on turntable 120 to avoid any skipping or other dislocated movement of the digital disc during contact with the sanding worktools 144, 145.

5           The second workstation defined by turntable 121  
likewise comprises three worktools, namely worktools 150,  
151, 152 (Figure 4). Worktools 150, 151 conveniently  
utilise a material such as a borax powdered material which  
finely removes a further small amount of material or  
discontinuities from the overlay of the digital disc which  
10   may be present following the material removal at first  
workstation 120. Worktool 152 of workstation 151 is  
identical to worktool 146 at the first workstation; that  
is, the worktool 152 maintains good contact between the  
digital disc being reconditioned and the turntable 121 and  
15   prevents any discontinuous relative movement between the  
digital disc and the turntable 121 during the material  
removal operations being conducted upon the overlay of the  
digital disc.

20           The third workstation defined by turntable 122 is  
the rinse and wax workstation with worktools 153, 154, 155.  
Worktool 154 emits a rinsing solution to remove any material

which has been removed from the digital disc at workstations 120, 121 and worktool 155 emits a waxing material to coat the upper surface of the digital disc being reconditioned thereby providing a new protective coating on the digital disc being reconditioned. Worktool 155 is identical to worktools 146, 152 and maintains the digital disc on turntable 122. Worktools 150, 151 do not rotate and do not contact the overlay of the digital disc being reconditioned.

The fourth and final workstation defined by turntable 123 is the polishing workstation. At this workstation, worktools 160, 161 have a buffing material mounted on their heads which buffing material is brought into contact with the digital disc to polish and buff its now reconditioned plastic overlay. Worktool 162 is identical to worktools 146, 152, 155, all of which have been described.

A receiving cartridge 163 is positioned following the workstations 120, 121, 122, 123. Receiving cartridge 163 receives the reconditioned digital discs and stores them until the reconditioned discs are manually removed from the receiving cartridge 163 by the operator.



OPERATION

In operation, a plurality of damaged digital discs will have been received from an operating location or other source such as a video or disc rental outlet. These discs  
5 will be stacked and placed within the digital disc feed cartridge 113. The operation of the digital disc reconditioning machine 100 will then commence.

The operation of motor 111 (Figure 1) which controls the reciprocal and rotatable movement of the  
10 turntable 110 will be initiated. Arm 164 (Figure 3) which is connected between motor 111 and turntable 110 will move the turntable 110 between the load and unload positions 170, 171, respectively. The load position 170, directly under the digital disc cartridge 113, allows only one disc to  
15 enter the recess 112 in turntable 110. With the rotation of the turntable 110 to the unload position 171, the remaining ones of the damaged digital discs within cartridge 113 will remain within the cartridge 113.

Following the movement of the disc to the unload

station 171, the suction tools 130 (Figure 4) over the turntable 110 will be brought into contact with the digital disc and the suction within the suction tools 130 will grasp the digital disc on turntable 110. Shaft 124 will be  
5 rotated counterclockwise about axis 172 by pneumatic cylinder 173 (Figure 2) and the suction tools 130, being fixedly mounted on shaft 124 as best seen in Figure 4, will likewise rotate upwardly about axis 172 with shaft 124 or clockwise as viewed in Figure 2. The digital disc,  
10 thereafter, will assume a vertical orientation ninety(90) degrees removed from the horizontal position where the digital disc is initially grasped by the suction tools 130 as illustrated in Figure 2.

The shaft 124 is then moved rightwardly as viewed  
15 in Figures 1 and 4 by contraction of pneumatic cylinder 174 (Figure 4) until the digital disc is positioned vertically besides turntable 120 which defines the first workstation. The shaft 124 is rotated clockwise as viewed in Figure 2 by pneumatic cylinder 173 and the suction tools 130 will  
20 position the digital disc directly on turntable 120 with the suction tools assuming a generally horizontal position. The suction within suction tools 130 will be terminated and the

digital disc will rest on turntable 120. The shaft 124 and attached suction tools 130 will thereafter be rotated upwardly with the suction tools 130 again assuming a generally vertical position approximately ninety(90) degrees removed from the position wherein the digital disc was deposited on the turntable 120. The shaft 124 will subsequently move leftwardly as viewed in Figures 1 and 4 under the influence of pneumatic cylinder 174 until the suction tools 130 are directly over turntable 110 thereby being in a position to retrieve a second disc from the unload position 171 on turntable 110.

Following the deposit of the digital disc on turntable 120, motor 133 initiates operation in order to rotate the turntables 120, 121, 122, 123 by rotation of pulleys 179 (Figure 2), only one of which is illustrated, which are belt connected with motor 133. At substantially the same time, the operation of the pneumatic cylinder 143 is initiated such that the cylinder 143 is contracted and thereby lowers the upper head 140 on guide rails 141, 142 with the attached worktools 144, 145, 146. The worktools 144, 145, 146 are rotated with the use of pulleys 180 (Figure 4) driven by a first upper workstation motor 147

(Figure 1). Each set of worktools at each workstation has an individual motor which is used to drive the worktools at separate stations at speeds which are varied according to the worktool application.

5                   While the sanding operation occurs between the worktools 144, 145 and the digital disc on turntable 120, worktool 146 will maintain the digital disc in contact with the turntable 120. The head of worktool 146 which is contacting the disc will rotate with the disc thereby  
10 preventing any relative movement between the disc and the turntable 120 during the sanding operation.

                  Following the completion of the sanding operation, the pneumatic cylinder 143 is extended thereby raising the upper head 140 and removing the worktools 144, 145, 146 from  
15 contact with the digital disc on turntable 120. The shaft 124 will be rotated until the suction tools 130 are in proximity with the digital disc on turntable 120. It will be noted that the first set of suction tools 130 as located most leftwardly in Figure 1 will simultaneously be in  
20 proximity with a second digital disc within recess 112 on turntable 110.

The suction within suction tools 130 is activated and the suction tools grasp the sanded disc on turntable 120 while simultaneously grasping a further disc on turntable 110. Thus, at this point, two digital discs are being held by suction tools 130. Shaft 124 is again rotated counterclockwise as viewed in Figure 2 until each of the two discs assumes a vertical position as shown and being removed from turntables 110, 120. Shaft 124 is reciprocated by pneumatic cylinder 174 (Figure 4) thereby to move the first digital disc to a position adjacent to turntable 121 for fine material removal and to move the second digital disc obtained from turntable 110 to a position adjacent turntable 120 for the aforementioned sanding or rough material operation.

The process continues until there are digital discs present on all of the five(5) turntables 110, 120, 121, 122, 123, simultaneously.

Following the final polishing or buffing operation at the fourth workstation defined by turntable 123, the reconditioned digital disc is moved again by the reciprocal movement of shaft 124 until the suction tools 130 shown in

phantom in Figure 1 are directly above the receiving cartridge 163. When the suction is terminated, the reconditioned disc is dropped by the suction tools directly into the receiving cartridge 163 for manual retrieval with others of the reconditioned discs on which operations have been conducted.

There are three(3) independently operated motors at the workstations defined by turntables 120, 121 and 123. This is so because it may be necessary to adjust the rotational speed of the worktools at each of these locations so as to differ from the rotational speed of the worktools at the remaining locations caused by the different operations taking place at each of the workstations. At the workstation defined by turntable 122, no rotational movement of the worktools is necessary since two of the worktools emit a rinse and wax solution, respectively, and the third one of the worktools 155 (Figure 4) has a head which rotates with the turntable 122.

The sequence of events and the initiation of the suction, shaft rotation, shaft reciprocity, motor commencement, etc. are all controlled by a programmable

controller 105. Thus, the events may be initiated or terminated relative to the remaining events so as to provide efficient operation and unwasted motion during the reconditioning operation.

5                   Many modifications will readily occur to those skilled in the art to which the invention relates. The operation of the turntable on which the digital discs are deposited from the cartridge 113, although being reciprocated between the load and unload positions as  
10                   described, may be rotatable with two discs being positioned on the turntable 110 as illustrated in Figure 1. Other modifications would include the use of hydraulic cylinders rather than pneumatic cylinders and, likewise, controlling components being operable with various components being  
15                   used.

                  Many further modifications will readily occur to those skilled in the art to which the invention relates and the particular embodiments described herein should be taken as illustrative of the invention only and not as limiting  
20                   its scope which should be construed in accordance with the accompanying claims.

I CLAIM:

1. Apparatus for reconditioning a protective coating on a digital disc, said apparatus comprising at least one tool at a first workstation being operable to be brought into contact with said protective coating and a disc advancement mechanism to advance said digital disc from said first workstation to a second and successive workstation.

2. Apparatus as in claim 1 wherein said disc advancement mechanism comprises a suction tool to grasp said digital disc at said first workstation and to deposit said digital disc at said second workstation.

3. Apparatus as in claim 2 wherein said suction tool is connected to a movable member, said movable member being movable relative to said first and second workstations.

4. Apparatus as in claim 3 wherein said movable member is a shaft having a longitudinal axis, said shaft being rotatable about said longitudinal axis and being



reciprocal along said longitudinal axis.

5. Apparatus as in claim 4 and further comprising a feed area to feed said digital discs to said first and second workstations, said feed area comprising a  
5 cartridge to hold a plurality of said digital discs.

6. Apparatus as in claim 5 wherein said first and second workstations are defined by a first and second turntable, respectively, said suction tools depositing and removing said digital discs from said first  
10 and second turntables.

7. Apparatus as in claim 6 wherein said first and second workstations are further defined by a first and second set of worktools, respectively, said first set of worktools being operable on said digital disc to remove  
15 material from said protective coating.

8. Apparatus as in claim 7 wherein said second set of worktools are operable on said digital disc to rinse said digital disc of said removed material.

9. Apparatus as in claim 8 and further comprising a third workstation and a third set of worktools operably associated with said third workstation, said third set of worktools being operable to polish said protective coating on said digital disc.

10. Apparatus as in claim 9 wherein said feed area further comprises a turntable, said turntable being rotatable between a load position wherein said digital disc is retrieved from said cartridge and an unload position wherein said digital disc is removed from said turntable.

11. Apparatus as in claim 10 wherein said digital disc is removed from said turntable by said suction tools.

12. Apparatus as in claim 11 wherein said worktools are mounted on a head, said head being vertically movable relative to said turntables, at least some of said worktools being rotatable relative to said head.

13. Apparatus as in claim 12 wherein said worktools form a plurality of sets, each of said sets of

worktools being independently driven relative to said  
remaining ones of said sets of worktools.

14. Apparatus as in claim 13 wherein said  
shaft has an internal cavity, said cavity having a negative  
5 or suction pressure, said negative pressure being applied to  
said suction tools from said internal cavity of said shaft.

15. Apparatus as in claim 14 and further  
comprising a receiving cartridge, said receiving cartridge  
receiving said digital disc following the last one of said  
10 plurality of workstations.

16. Method for reconditioning a protective  
coating on a compact disc, said method comprising  
positioning said disc in a first workstation, bringing a  
first tool into contact with said protective coating for  
15 reconditioning said protective coating in a first operation  
and transferring said compact disc from said first  
workstation to a subsequent work station when said first  
tool has completed said first operation.

17. Method as in claim 16 wherein said

digital disc is transferred from said first to said second workstation by a suction member.

18. Method as in claim 17 and further comprising removing damaged protective layer from said digital disc in said first workstation.

19. Method of reconditioning a plurality of digital discs which have had protective coatings damaged resulting in a misread or a non-read of data on said discs, said method comprising obtaining said digital discs from a source of digital discs, transferring said digital discs from said source to a protective coating reconditioning machine, reconditioning said protective coatings of said digital discs in said reconditioning machine by automatic transfer of said discs between at least two workstations in a reconditioning process to obtain reconditioned discs and returning said reconditioned discs to said source.

ABSTRACT OF THE DISCLOSURE


Apparatus and method for reconditioning the protective coating of a digital disc. The damaged digital disc is automatically moved between workstations by a suction member which grasps the disc at the first workstation and releases the disc at the second workstation. Each of the workstations is defined by worktools which operate on the digital disc. A feed cartridge member stores the damaged discs prior to movement of the discs into the first workstation and a receiving cartridge member stores the reconditioned discs following the final reconditioning operations at the last workstation.

specs/coo4444.wpd

I HEREBY CERTIFY THAT THIS DOCUMENT AND/OR FEE BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESS SERVICE UNDER 37 CFR. 1.10 ON THE DATE INDICATED BELOW AND IS ADDRESSED TO THE COMMISSIONER OF PATENTS AND TRADEMARKS, WASHINGTON, D.C. 202

DATE OF DEPOSIT: Jul 7, 2000

EXPRESS MAIL MAILING NUMBER: EK138616343US

  
JOHN R. UREN  
Reg. No. 27,530


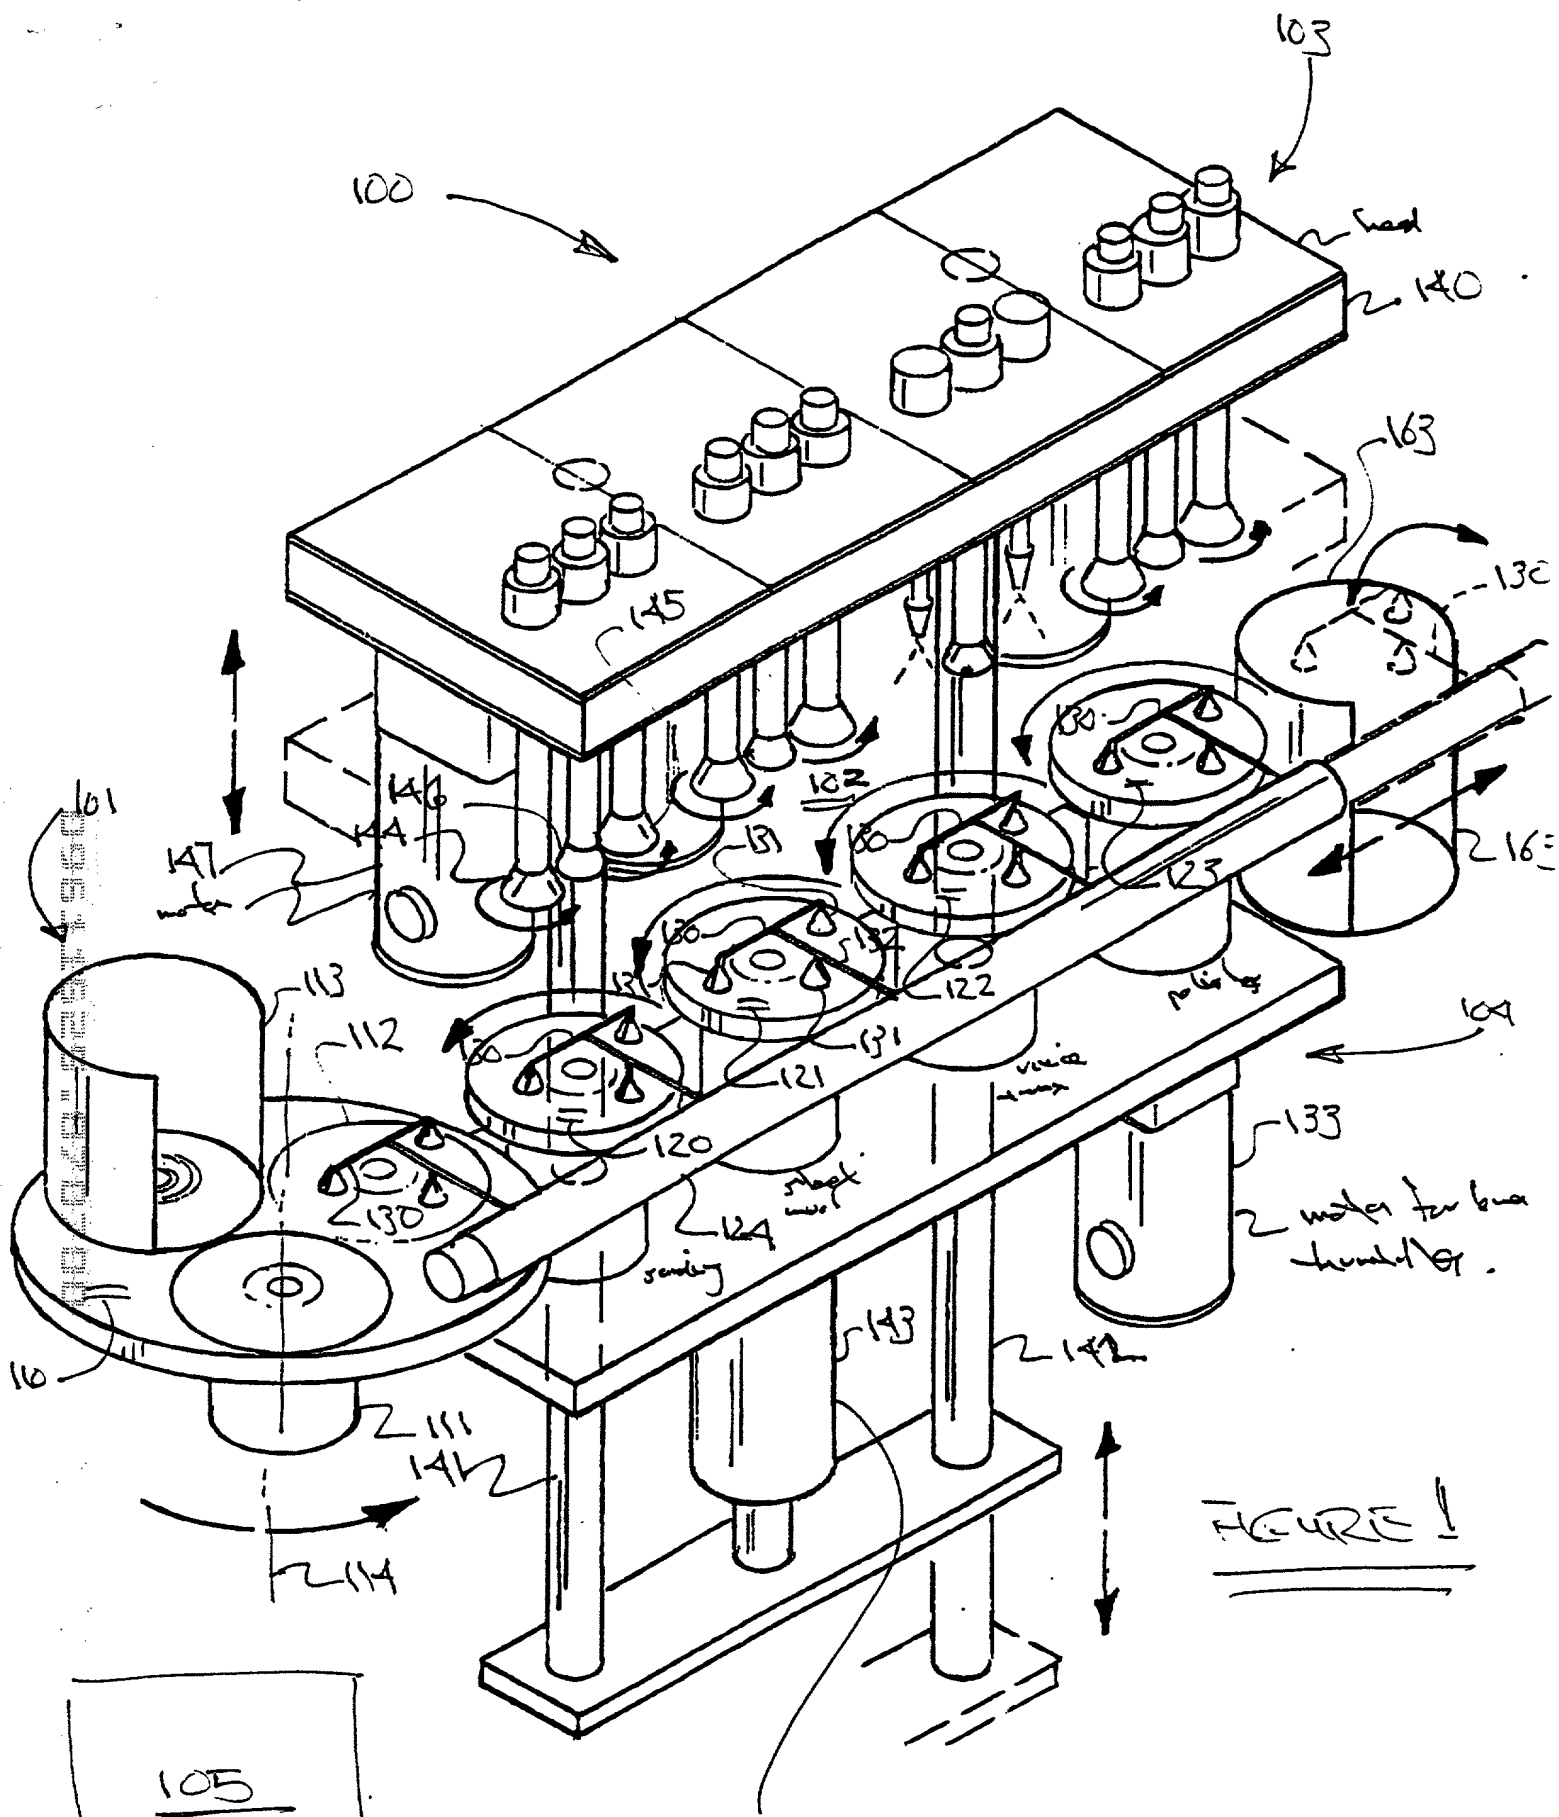


FIGURE 1

105

FIGURE 2

SECRET

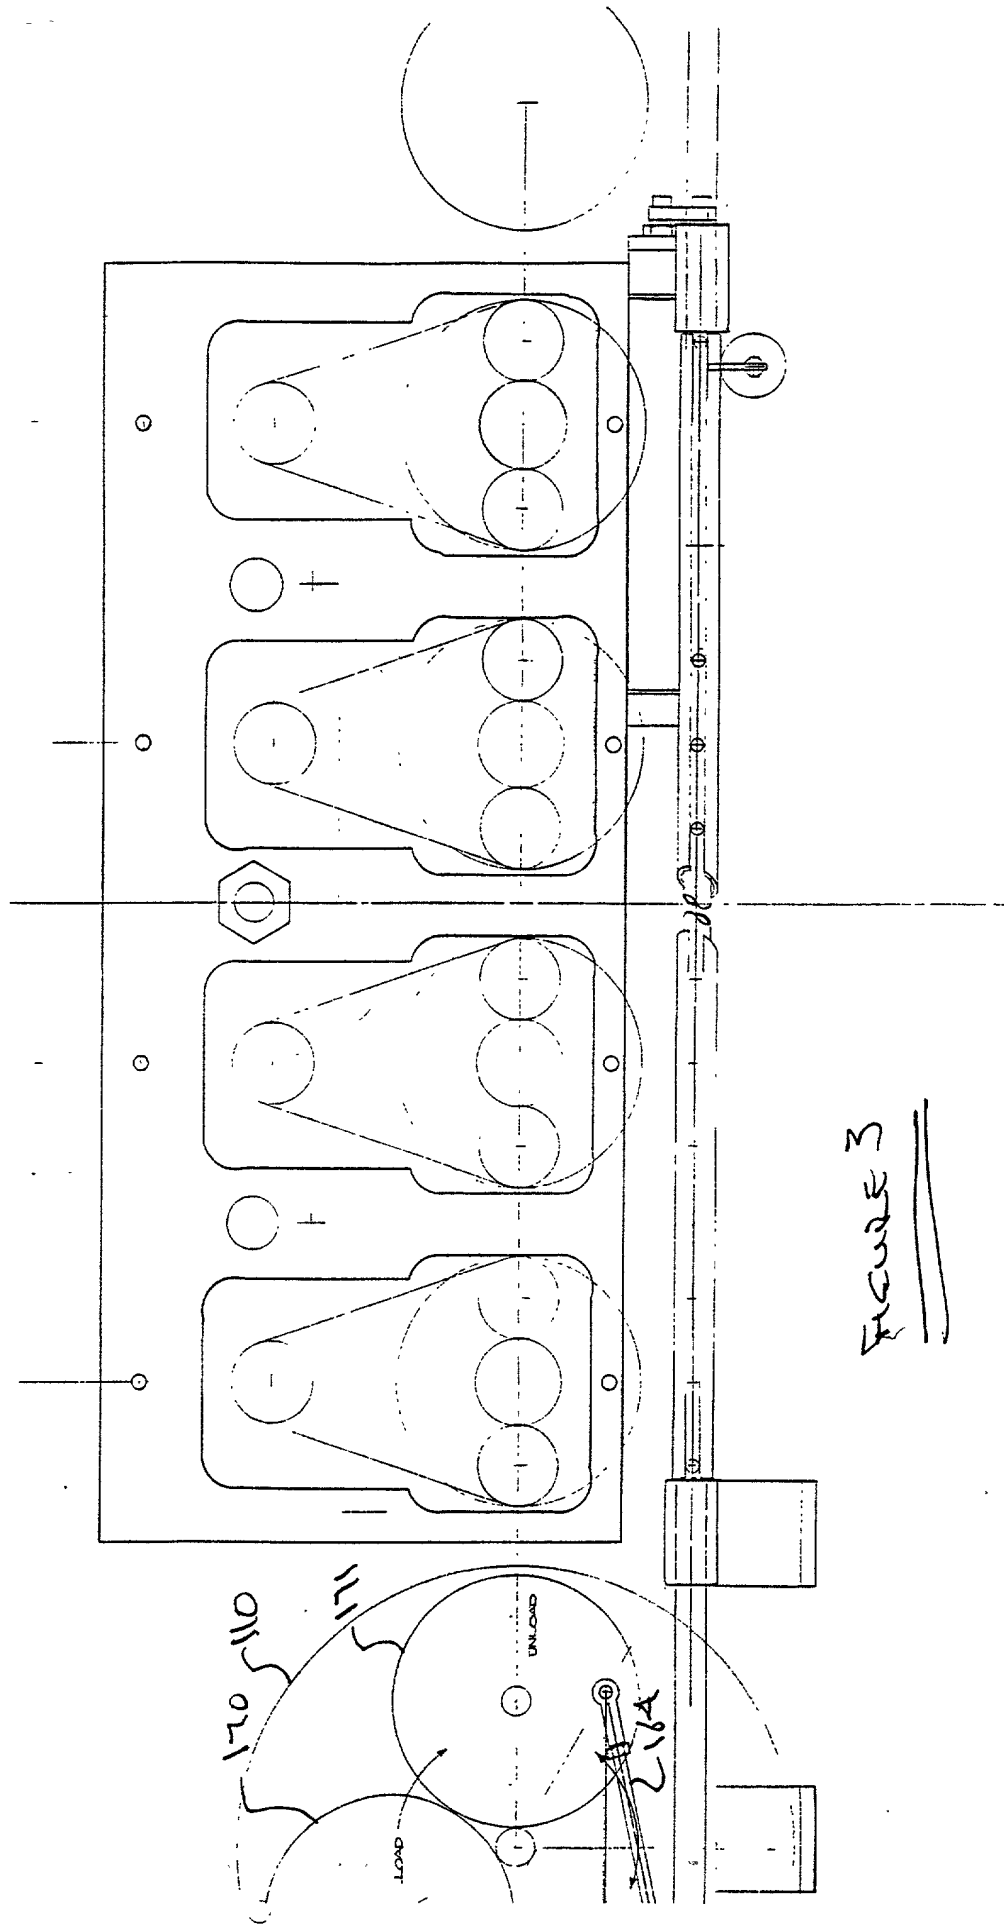



336633 336633 336633

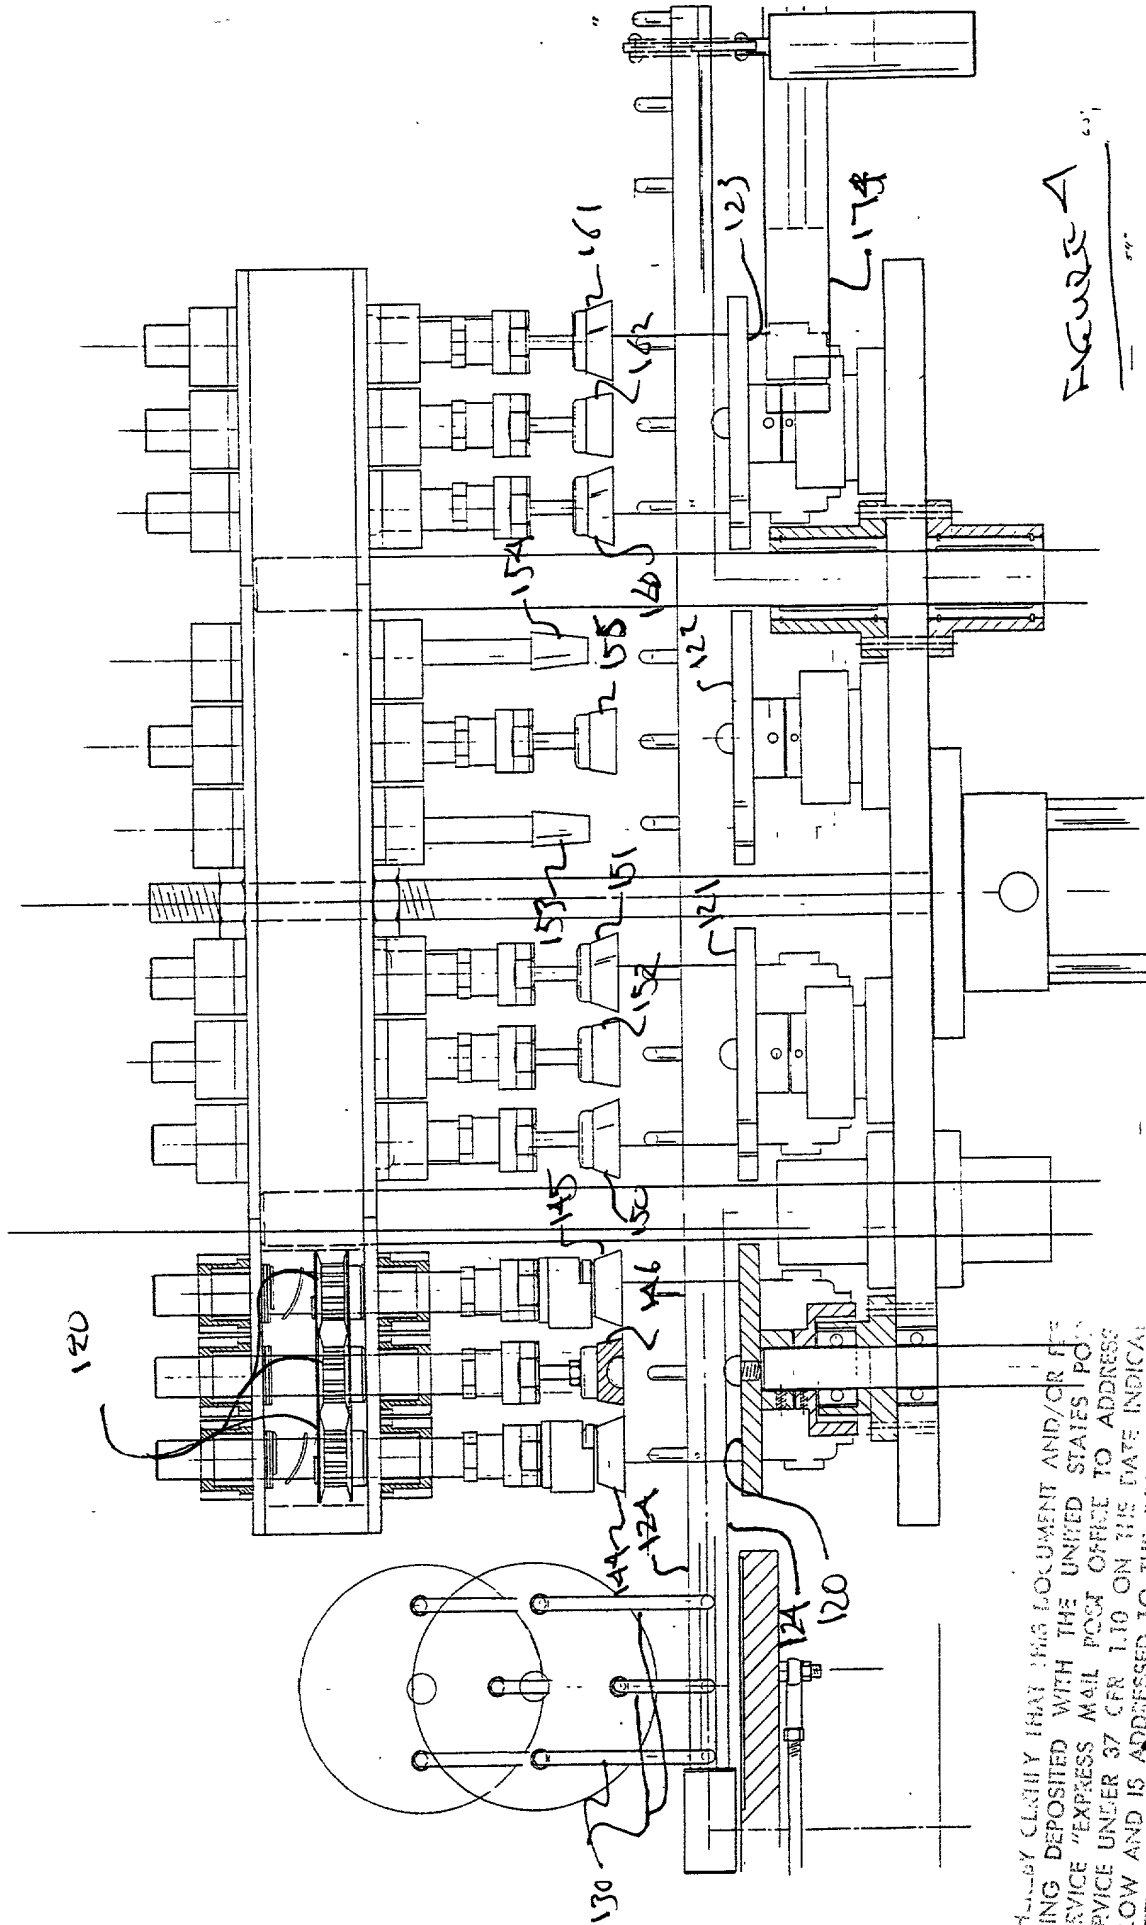


FIGURE 1  
FIGURE 2  
FIGURE 3  
FIGURE 4  
FIGURE 5  
FIGURE 6  
FIGURE 7  
FIGURE 8  
FIGURE 9  
FIGURE 10  
FIGURE 11  
FIGURE 12  
FIGURE 13  
FIGURE 14  
FIGURE 15  
FIGURE 16  
FIGURE 17  
FIGURE 18  
FIGURE 19  
FIGURE 20  
FIGURE 21  
FIGURE 22  
FIGURE 23  
FIGURE 24  
FIGURE 25  
FIGURE 26  
FIGURE 27  
FIGURE 28  
FIGURE 29  
FIGURE 30  
FIGURE 31  
FIGURE 32  
FIGURE 33  
FIGURE 34  
FIGURE 35  
FIGURE 36  
FIGURE 37  
FIGURE 38  
FIGURE 39  
FIGURE 40  
FIGURE 41  
FIGURE 42  
FIGURE 43  
FIGURE 44  
FIGURE 45  
FIGURE 46  
FIGURE 47  
FIGURE 48  
FIGURE 49  
FIGURE 50  
FIGURE 51  
FIGURE 52  
FIGURE 53  
FIGURE 54  
FIGURE 55  
FIGURE 56  
FIGURE 57  
FIGURE 58  
FIGURE 59  
FIGURE 60  
FIGURE 61  
FIGURE 62  
FIGURE 63  
FIGURE 64  
FIGURE 65  
FIGURE 66  
FIGURE 67  
FIGURE 68  
FIGURE 69  
FIGURE 70  
FIGURE 71  
FIGURE 72  
FIGURE 73  
FIGURE 74  
FIGURE 75  
FIGURE 76  
FIGURE 77  
FIGURE 78  
FIGURE 79  
FIGURE 80  
FIGURE 81  
FIGURE 82  
FIGURE 83  
FIGURE 84  
FIGURE 85  
FIGURE 86  
FIGURE 87  
FIGURE 88  
FIGURE 89  
FIGURE 90  
FIGURE 91  
FIGURE 92  
FIGURE 93  
FIGURE 94  
FIGURE 95  
FIGURE 96  
FIGURE 97  
FIGURE 98  
FIGURE 99  
FIGURE 100

FIGURE 101  
FIGURE 102  
FIGURE 103  
FIGURE 104  
FIGURE 105  
FIGURE 106  
FIGURE 107  
FIGURE 108  
FIGURE 109  
FIGURE 110  
FIGURE 111  
FIGURE 112  
FIGURE 113  
FIGURE 114  
FIGURE 115  
FIGURE 116  
FIGURE 117  
FIGURE 118  
FIGURE 119  
FIGURE 120  
FIGURE 121  
FIGURE 122  
FIGURE 123  
FIGURE 124  
FIGURE 125  
FIGURE 126  
FIGURE 127  
FIGURE 128  
FIGURE 129  
FIGURE 130  
FIGURE 131  
FIGURE 132  
FIGURE 133  
FIGURE 134  
FIGURE 135  
FIGURE 136  
FIGURE 137  
FIGURE 138  
FIGURE 139  
FIGURE 140  
FIGURE 141  
FIGURE 142  
FIGURE 143  
FIGURE 144  
FIGURE 145  
FIGURE 146  
FIGURE 147  
FIGURE 148  
FIGURE 149  
FIGURE 150  
FIGURE 151  
FIGURE 152  
FIGURE 153  
FIGURE 154  
FIGURE 155  
FIGURE 156  
FIGURE 157  
FIGURE 158  
FIGURE 159  
FIGURE 160  
FIGURE 161  
FIGURE 162  
FIGURE 163  
FIGURE 164  
FIGURE 165  
FIGURE 166  
FIGURE 167  
FIGURE 168  
FIGURE 169  
FIGURE 170  
FIGURE 171  
FIGURE 172  
FIGURE 173  
FIGURE 174  
FIGURE 175  
FIGURE 176  
FIGURE 177  
FIGURE 178  
FIGURE 179  
FIGURE 180  
FIGURE 181  
FIGURE 182  
FIGURE 183  
FIGURE 184  
FIGURE 185  
FIGURE 186  
FIGURE 187  
FIGURE 188  
FIGURE 189  
FIGURE 190  
FIGURE 191  
FIGURE 192  
FIGURE 193  
FIGURE 194  
FIGURE 195  
FIGURE 196  
FIGURE 197  
FIGURE 198  
FIGURE 199  
FIGURE 200

JOHN R. UREN  
Reg. No. 27,530